

Product Line	Floor Model Donut Fryers (Gas)	SPEC 718-24-34/ 03-2013
Models	718LCG, 724CG, 734CG	

718LCG, 724CG, 734CG Floor Model Gas Fryers

Belshaw Adamatic floor model gas fryers are designed to efficiently produce all varieties of cake donut and yeast raised donut. Almost any size and shape of donut (or similar product) can be fried in these adaptable and dependable fryers.

- **Compact.** The space needed to operate a Belshaw Adamatic 718LCG gas or electric fryer is just 6 feet x 3½ feet (1.8m x 1.1m), including cake donut depositor and open drain tray. Larger models need only slightly increased space allowance.
- **Productive.** You can make from 65 to 150 dozen donuts per hour on one of three standard sizes. That leaves more time to finish and customize your donuts exactly the way you want.
- **Efficient.** Belshaw Adamatic's 'Controlled Combustion' burner tube technology maximizes gas efficiency and generates energy savings throughout the life of the fryer.
- **Convenient.** With a Belshaw Adamatic Open Kettle donut system, the fryer, cake donut depositor, and filtration system are each designed to work together. Easy-to-use submerger screens can be added to further improve production efficiency.

Products made commercially using floor model gas fryers:

- Donuts
- Hushpuppies
- Loukoumades
- Funnel cakes
- Elephant ears
- Fried pies
- Falafel
- Paczkis, porogis
- Fritters, fried dough
- Crab cakes, clam strips
- Fried corn
- Fried vegetables
- Tortilla Chips
- + More fried goods of all kinds

Belshaw provides a full line of complementary equipment designed for donut production:


- EP18-24 Proofing Cabinet
- Type 'B' or Type F cake donut depositors
- EZ Melt Shortening Melter-Filter
- SF Shortening Filter
- HI18/HI24 Production Icers
- H&I-2 / H&I-4 Icing Tables
- HG, HGEZ Hand Glazers



Belshaw 724CG Gas Fryer (shown with optional Type 'F' donut depositor, EZ Melt filter and submerger screen)


718LCG

Holds up to
24 Donuts
Capacity approx
**65-80
dozen/hour**




724CG

Holds up to
36 Donuts
Capacity approx
**80-120
dozen/hour**



734CG

Holds up to
48 Donuts
Capacity approx
**130-150
dozen/hr**



90 Years of Quality Donut & Bakery Equipment

BELSHAW ADAMATIC BAKERY GROUP

814 44th St NW, Suite 103
Auburn, WA 98001 USA
PART OF ALI GROUP SPA



CONTACT

800.578.2547 (USA/CANADA)
(+1)206.322.5474 Worldwide
service@belshaw.com

WEB

www.belshaw-adamatic.com
www.belshaw.com
www.adamatic.com

SPEC
718-24-34/
03-2013

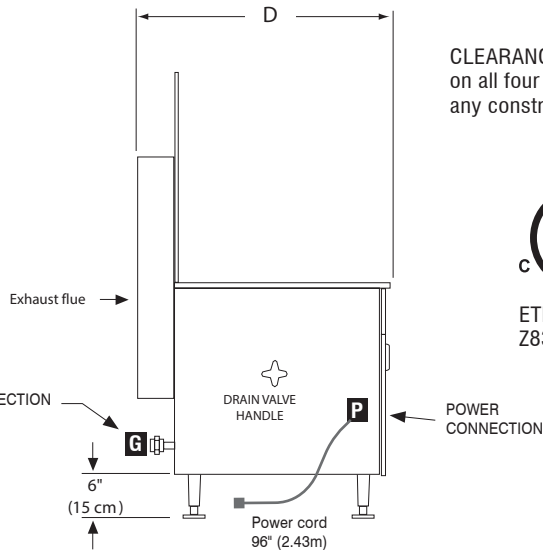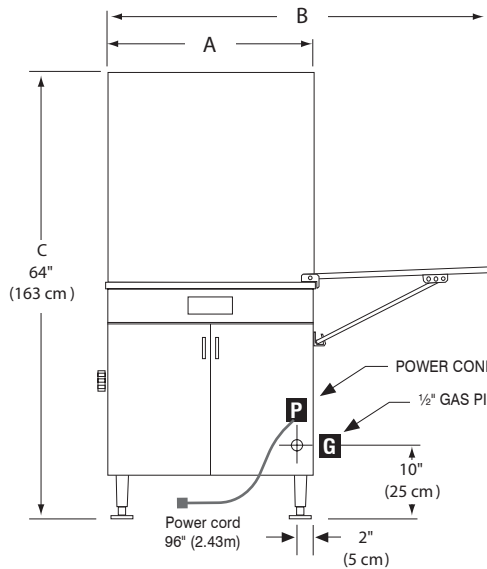

CLEARANCE: Allow 2 inches (5 cm) on all four sides between fryer and any construction



ETL certified to NSF-4, ANSI Z83.11a and CSA1.8a.2004

STANDARD FEATURES

- Stainless steel cabinet, kettle, and drain tray, with sloping surface around fryer kettle
- Electronic ignition (standing pilot optional, see below)
- Digital electronic thermostat control (non-electric thermostat control optional, see below)
- High-temperature limit switch set to approximately 450° F (230° C)
- Exhaust flue
- Adjustable, bolt down legs
- Drain tray on right side of fryer. Can easily be relocated to left side.
- Heavy duty drain and valve with exterior handle
- Reinforced left side panel to accept Belshaw cake donut depositor mount. (Can be switched to right side)
- 2 nickel plated cake donut frying screens with bolt-on heat dissipating handles
- Backsplash
- Frame reinforcement for mounting a Belshaw Cake Donut Depositor, installed at left. Can be moved to right.
- 120 Volts or 240 Volts, 50/60Hz, 1-phase (specify)
- Natural Gas and Propane models are available. A conversion kit is available if changeover is needed
- ETL certified to NSF-4, ANSI Z83.11a and CSA1.8a.2004

OPTIONS AND ACCESSORIES

- Standing pilot ignition and thermocouple temperature control – no electricity required. (Standing pilot models are designated: 718LFG, 724FG, 734FG)
- Submerger screen
- Draft inducer kit (recommended for Propane models, and for Natural Gas above 3,000 ft)
- Type B (manual) or Type F (electric) cake donut depositor
- 'SF' or 'EZMelt' filtration systems
- Proofing screens for raised donuts
- Screen Cradle

SPECIFICATIONS

		718LCG	724CG	734CG
FRYING AREA	inches	18" x 26"	24" x 24"	34" x 24"
	cm	46 x 66 cm	61 x 61 cm	86 x 61 cm
SCREEN SIZE	inches	17" x 25"	23" x 23"	33" x 23"
SHORTENING CAPACITY (approx)	lbs	96 lbs	119 lbs	215 lbs
	kg	44 kg	54 kg	98 kg
	gallons	13 gal	16 gal	29 gal
	liters	49 L	61 L	110 L
BTU/hour		44,000	60,000	89,000
GAS CONNECTION	inches	Natural Gas 5"-14" W.C – Propane 11"-14" W.C.		
	pascal	Natural Gas: 1.24–3.4 kpa – Propane: 2.4-3.4 kpa		
	connector	1/2" NPT		
VOLTS	volts	120V-50/60-1 or 240V-50/60-1 (specify)		
AMPS	amps	0.5 A @120V or 0.25 A @240V		
PLUG		NEMA 5-15P (120V) or NEMA 6-15P (240V)		
CORD LENGTH		8 feet (2.5 m)		
WIDTH (A) <i>(drain tray CLOSED)</i>	inches	27"	32"	42"
	cm	69 cm	81 cm	107 cm
WIDTH (B) <i>(drain tray OPEN)</i>	inches	48"	56"	77"
	cm	122 cm	142 cm	196 cm
HEIGHT (C)	inches	64"	64"	64"
	cm	163 cm	163 cm	163 cm
DEPTH (D)	inches	40"	38"	38"
	cm	102 cm	97 cm	97 cm
SHIPPING DIMENSIONS <i>(crate)</i>	inches	40 x 48 x 54	40 x 48 x 54"	50 x 45 x 52
	cm	102x122x137	102x122x137	127x114x132
SHIPPING WEIGHT	lbs	282 lbs	296 lbs	417 lbs
	kg	128 kg	135 kg	190 kg
FREIGHT CLASS		85	85	85

90 Years of Quality Donut & Bakery Equipment

BELSHAW ADAMATIC BAKERY GROUP

814 44th St NW, Suite 103
Auburn, WA 98001 USA
PART OF ALI GROUP SPA

CONTACT

800.578.2547 (USA/CANADA)
(+1)206.322.5474 Worldwide
service@belshaw.com

WEB

www.belshaw-adamatic.com
www.belshaw.com
www.adamatic.com

SPEC
718-24-34/
03-2013